



Protocol Supported

ITU-T H.323 v2/v3/v4 compliance
SIP RFC3261

Supplementary Service

H.450 (Call Hold, Call Transfer, Call Forward)

FAX Support

Automatic FAX detection
Group 3 Fax relay at 2.4 - 14.4 kbps
Support T.38 protocol

Codec Supported

G.711A/u-law, G.723.1, G.729, G.729A, G.729B,
G.729AB

Vocie Quality

VAD (Voice Activity Detection)
CNG (Comfort Noise Generation)
G.165/G.168 compliant echo cancellation
Programmable Dynamic Jitter Buffer
Bad Frame Interpolation
Provide both in-band and out of band DTMF generation
detection
Gain/Attenuation Settings
Provide progress tone: Dial Tone, Busy Tone,
2nd Dial Tone, Call-Holding Tone and Ring-Back Tone

QoS

TOS

Caller ID

Generation (FSK/DTMF)

Tone

DTMF/CPT (Call Progress Tone) Generation/Detection

ADSL Environment

PPPoE

Firewall Environment

Behind NAT Router or IP sharing device

Security


Support H.235 security function

Configuration & Management

Console port, TELNET and Web Browser

Upgrade

Firmware upgrade through network by TFTP/FTP

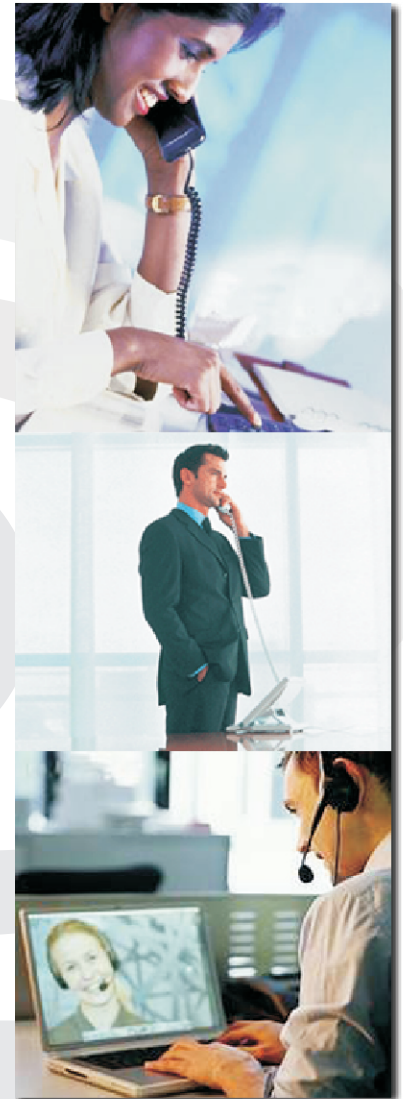

IP-FXS



01-800-22-INDEX

www.INDEX.com.mx